

**DESCRIPTION**

DC-M155A is a high performance double-sided polyester film (PET) adhesive tape, coated with a specially engineered acrylic adhesive designed to work exceptionally well in cold weather temperatures. Used extensively in commercial construction including metal building insulation applications, it is versatile enough to work in many other applications due to its cold weather performance features.

**APPLICATIONS**

- Use for lap seals on laminated, reflective and pipe jacketing insulation
- Use to mount smooth surface substrates in freezers
- Use for permanently bonding foams, plastics, metals and composite materials
- Use for insulation mounting

**FEATURES AND BENEFITS**

- Hand tearable
- Hand or machine applied
- Excellent holding power
- Specially formulated cold weather adhesive
- Bonds well to a variety of surfaces
- PET carrier allows for UV resistance
- Performs well under a broad range of environmental conditions

**SIZES**

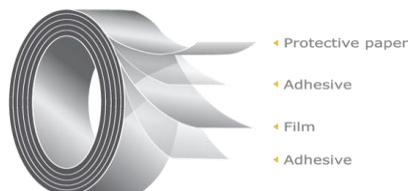
- 1.41 in x 60 yd. | 36 mm x 55 m
- 1.41 in x 180 yd. | 36 mm x 165 m
- 1.41 in x 360 yd. | 36 mm x 330 m

**COLOUR**

- Clear

**PRODUCT CONSTRUCTION**

Carrier	Polyester film
Adhesive	Acrylic
Release Liner	Siliconized paper

**TECHNICAL DATA**

Total Thickness	3.6 mils
Tensile Strength	7.7 lbs/in.
Adhesion to Steel	40 oz./in.
Elongation	75%
Application Temperature	-4°F to 176°F (-20°C to 90°C)
Service Temperature	-40°F to 176°F (-40°C to 90°C)

**STORAGE & USAGE CONDITIONS**

**Store tape in its original packaging away from direct sunlight and in a cool and dry area.**

**For optimum performance, tape should be used within 12 months of date of shipment.**

**Tape works best when applied to a surface that is clean, dry and free of grease, oil or other contaminants.**

The information cited is in good faith and has been established from sources held to be secure and reliable. The values listed are typical properties. Individual rolls may vary slightly from these values. All ECHOtape products are warranted to be free of defects at time of shipment. Many factors can affect the use and performance of a product in a particular application and the user must, by test or otherwise, determine suitability for purpose; Edelstein makes no representation or warranty, express or implied, concerning any application and usage of its products. If ECHOtape product is proved to be defective, the exclusive remedy, shall be for Edelstein to replace the defective product. ECHOtape shall not otherwise be liable for loss or damages, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted, including but not limited to, contract, negligence, warranty or strict liability.