



Insulation solutions for everyday jobs.

3M Building and Construction Market Center



Reliable products that help
you get the job done faster.



Tapes

Insulation Jacketing Tapes.....	3
Insulation Seaming Tapes.....	4-5
HVAC Foil Tapes	5
Metal Building Tapes	6
Flashing and Seaming Tapes.....	6
Duct Tapes	7



Spray Adhesives

Cylinder Adhesives	8
Cylinder Accessories.....	8
Aerosol Adhesives	9



Fire Protection

Duct Wrap.....	10
Plenum Wrap.....	10
Dryer Ventilation Wrap	10
Sealants, Sprays & Tapes.....	11



Safety

Protective Eyewear.....	12-13
Hearing Protection.....	14
Disposable Respirators	14
Reusable Respirators	14
Protective Coveralls	15
Work Gloves.....	15



Insulation Jacketing Tapes

3M™ VentureClad™ Insulation Jacketing Tape 1577CW

All-weather option for various jacketing applications. It offers superior resistance to weathering, mold, UV and extreme environmental conditions. Aluminum multi-layered laminate tape is designed to provide zero permeability and act as a vapor barrier for insulation cladding and jacketing applications.

Material ID	UPC	Size	Color	Roll/Case
7100043719	0-00-51128- 95759 -2	23" x 50 yd	Silver Embossed	1
7100043742	0-00-51128- 95757 -8	35-½" x 50 yd		
7100043718	0-00-51128- 95768 -4	23" x 50 yd	Silver Flat	
7100043761	0-00-51128- 95779 -0	35-½" x 50 yd		


Meets the FDA Compositional Requirements for Indirect Food Contact

7100043844	0-00-51128- 96529 -0	23" x 50 yd	White Embossed	1
7100043813	0-00-51128- 96530 -6	35-½" x 50 yd		
7100043741	0-00-51128- 95782 -0	23" x 50 yd	White Flat	
7100043716	0-00-51128- 95781 -3	35-½" x 50 yd		

3M™ VentureClad™ Insulation Jacketing Tape 1579CW

A heavy duty, multilayered, self adhesive embossed jacketing system.

Material ID	UPC	Size	Color	Roll/Case
7100214292	5-06-38060- 40466 -4	30" x 25 yd	Silver Embossed	1
7100209735	5-06-38060- 40465 -7		Silver Flat	
7100197873	0-06-38060- 40143 -9		White Flat	

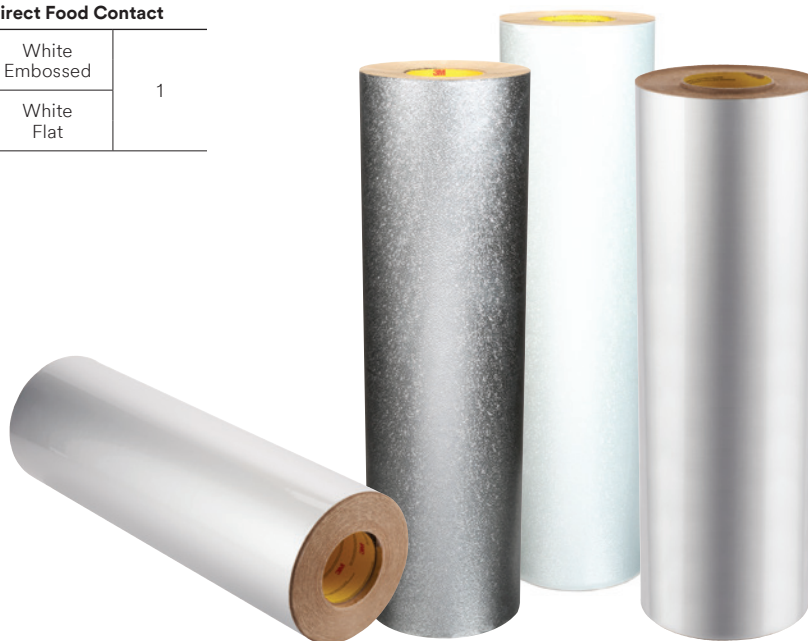



Insulation Seaming Tapes

3M™ Venture Tape™ Aluminum Foil Tape 1520CW

Features a nominal aluminum foil coated with pressure sensitive, cold weather acrylic adhesive. This tape combines flexible foil for irregularly-shaped applications and excellent low temperature performance. It conforms to fibrous ductboard and sheet metal ducts and works well in general-purpose heat shielding and light reflecting applications.



Material ID	UPC	Size	Color	Roll/Case
7100043715	5-07-50351- 15202 -0	48mm x 45.7m	Silver	24
7100169857	5-06-38060- 13991 -7	63.5mm x 45.7m		20
7100043713	5-07-50351- 15203 -7	72mm x 45.7m		16
7100043875	5-00-51128- 95520 -3	99mm x 45.7m		12

3M™ Venture Tape™ ASJ Facing Tape 1540CW


A white kraft paper, scrim and foil laminated tape coated with a pressure sensitive, cold weather, solvent acrylic adhesive. This tape combines quick stick at normal temperatures with superior low temperature performance. It applies easily and excels in demanding temperature and humidity conditions.



Material ID	UPC	Size	Color	Roll/Case
7100043768	5-07-50351- 15403 -1	72mm x 45.7m	White	16
7100043969	5-00-51128- 95658 -3	99mm x 45.7m		12
7100087495	5-00-51128- 95657 -6	123.75mm x 45.7m		8

3M™ Venture Tape™ FSK Facing Tape 1525CW

Matches FSK faced insulation board and duct. A foil/scrim/kraft (FSK) laminated tape coated with pressure sensitive, cold weather solvent acrylic adhesive. Quick stick at normal temperatures with superior low temperature performance. It conforms well to fibrous ductboard and blankets.



Material ID	UPC	Size	Color	Roll/Case
7100043764	5-07-50351- 15253 -2	72mm x 45.7m	Silver	16
7100043850	5-07-50351- 50015 -9	99mm x 45.7m		12

3M™ Venture Tape™ Film Faced ASJ Tape 106FXP

Flexible, white polypropylene/core/scrim/foil laminate facing coated with one of our 3M proprietary adhesives specifically formulated to adhere to polypropylene facings in both cold and hot humid temperatures. Contains mold inhibiting agents to help prevent corrosion under the insulation.



Material ID	UPC	Size	Color	Roll/Case
7100043807	5-00-51128- 95199 -1	72mm x 45.7m	White	16
7100087900	5-00-51128- 95200 -4	72mm x 45.7m		12
7010376447	5-00-76308- 98455 -2	5" x 50 yd Buttstrip		8






Insulation Seaming Tapes

3M™ Venture Tape™ Cryogenic Vapor Barrier Tape 1555CW

All-weather conformable, multi-layered self-adhesive tape designed for low temperature vapor barrier joint closure applications. This tape features a durable aluminum foil backing between two layers of .5 mil polyester film. Zero permeable laminate is coated with an aggressive, pressure sensitive cold weather acrylic adhesive.



Material ID	UPC	Size	Color	Roll/Case
7000049898	5-00-51128- 95731 -3	72mm x 45.7m	Silver	16
7100104081	5-00-51128- 95727 -6		White	

3M™ Venture Tape™ White Aluminum Foil Tape 1558HT

A high strength white aluminum foil coated with an aggressive cold weather acrylic pressure sensitive adhesive. It is designed for low temperature vapor barrier joint closure applications such as lap joints and vapor seals. It is ideal for use on white foil faced ductboard for a traditional crisp, white appearance.



Material ID	UPC	Size	Color	Roll/Case
7010335933	5-00-51115- 81356 -1	72mm x 45.7m	White	16



HVAC Foil Tapes

3M™ Venture Tape™ UL181A-P Aluminum Foil Tape 1581A

A high temperature, high strength UL printed aluminum foil tape coated with an acrylic pressure sensitive adhesive that meets UL181A-P, UL181B-FX and ULC S102 specifications. Conformable foil is excellent for rigid duct board applications. The tape excels in a variety of temperatures and environmental conditions, including high temperatures.




Material ID	UPC	Size	Thick	Color	Roll/Case
7100043830	5-07-50351- 15817 -6	2-1/2" x 60 yd	2 mils	Silver	20
7100043929	5-07-50351- 15813 -8	72mm x 55m			16
7010302857	5-00-76308- 14187 -0	99mm x 55m			12



Metal Building Tapes

3M™ Venture Tape™ Woven Patch Tape 442

Designed to match black woven insulation facings. It is capable of bonding quickly and strongly to a variety of hard-to-bond substrates. It is an acrylic tape composed of a high tack adhesive and a woven composition that has high elongation.



Material ID	UPC	Prod ID	Size	Color	Roll/Case
7100043941	5-00-51128- 96125 -9	442B	99mm x 50m	Black	15
7100043788	5-00-51128- 96128 -0	442W		White	

3M™ Venture Tape™ Vinyl Seaming Tape 460V

Embossed vinyl seaming tape coated with a high tack cold weather acrylic adhesive. Delivers excellent resistance to weathering and environmental conditions, and is ideal for seaming on vinyl faced fiberglass insulation and water heater blanket insulation systems.



Material ID	UPC	Prod ID	Size	Color	Roll/Case
7100043935	5-07-50351- 04607 -7	460V	72mm x 45.7m	White	16
7100043948	5-00-51128- 96144 -0			Black	

3M™ Venture Tape™ Metal Building Facing Tape

Tri-directionally reinforced, black metalized polypropylene film/scrim/kraft facing tape coated with a cold weather acrylic pressure sensitive adhesive.



Material ID	UPC	Prod ID	Size	Color	Roll/Case
7100043747	5-00-51128- 95615 -6	1531CW	72mm x 45.7m	White	16
7100043858	5-00-51128- 95613 -2			Black	
7100043751	5-07-50351- 15373 -7	1537CW		White	
7100052071	5-00-51128- 95621 -7			Black	
7100043931	5-00-51128- 95720 -7	1547CW		White	
7100043851	5-00-51128- 95739 -9	1568CW		White	

3M™ Venture Tape™ Vinyl Foam Tape

Designed to provide both a quick fix and long-lasting solution in applications that require vapor sealing and gap covering. It is composed of a closed-cell vinyl foam coated with a pressure-sensitive acrylic adhesive.



Material ID	UPC	Prod ID	Size	Color	Roll/Case
7010379940	5-00-51128- 95941 -6	1714	3/8" x 50'	Gray	32
7010313519	5-00-51128- 95940 -9		3/4" x 50'		16
7010378908	5-00-51128- 96543 -1		1-1/2" x 50'		8
7100051412	5-00-51128- 95942 -3		2" x 50'		6
7100043822	5-00-51128- 95943 -0		3" x 50'		4
7010379941	5-00-51128- 95946 -1	1718	3/8" x 75'	Gray	32
7010379942	5-00-51128- 95948 -5		1" x 75'		12
7100043818	5-00-51128- 95949 -2		2" x 75'		6
7100043826	5-00-51128- 95947 -8		3" x 75'		4

Flashing & Seaming Tapes

3M™ Construction Seaming Tape 8087CW

Cold weather sheathing tape designed to seal seams on housewrap and exterior sheathing materials. This tape features an aggressive pressure sensitive acrylic adhesive mounted on a biaxially oriented polypropylene film. It performs exceptionally well in cold temperature applications.

Material ID	UPC	Size	Color	Roll/Case
7010379550	5-00-76308- 14234 -1	48mm x 50m	White	24
7010314187	5-00-76308- 14235 -8	48mm x 50m	Red	
7010379551	5-00-76308- 14236 -5	60mm x 50m		20
7010337895	5-00-76308- 14237 -2	72mm x 50m		16
7010291680	5-00-76308- 14238 -9	99mm x 50m		12





Duct Tapes

3M™ All Purpose Duct Tape DT8

Constructed of polyethylene film laminated to cloth with a natural rubber adhesive, this aggressive tape resists curling and tears off the roll cleanly even when used in challenging jobs. Designed to provide a versatile, conformable, quick stick solution for demanding applications.



Material ID	UPC	Size	Thick	Color	Roll/Case
7100158345	5-00-76308- 98118 -6	48mm x 54.8m	8 mils	Silver	24
7100174104	5-06-89330- 17809 -9			Black	16

3M™ Super Duty Duct Tape DT17

Constructed of polyethylene film laminated to cloth with a natural rubber adhesive, this very thick and strong tape resists curling and tears off the roll cleanly even when used in the most demanding jobs. Designed to provide a maximum-strength, long-lasting solution for the ultimate applications.



Material ID	UPC	Size	Thick	Color	Roll/Case
7100158390	5-00-76308- 98121 -6	48mm x 54.8m	17 mils	Black	24

3M™ Heavy Duty Duct Tape DT11

Constructed of polyethylene film laminated to cloth with a natural rubber adhesive, this tough tape resists curling and tears off the roll cleanly for a variety of applications. Designed to provide a formidable, reliable solution for everyday challenges and adheres to numerous substrates, including plastic.



Material ID	UPC	Size	Thick	Color	Roll/Case
7100158377	5-00-76308- 98120 -9	48mm x 54.8m	11 mils	Silver	24
7100158346	5-00-76308- 98119 -3			Black	16

3M™ Venture Tape™ Cloth Duct Tape 1500

Constructed of polyethylene film laminated to cloth with a rubber adhesive, which resists curling and tears off the roll cleanly for easy application in MRO/construction. Unique construction that allows for permanent and temporary applications.



Material ID	UPC	Size	Thick	Color	Roll/Case
7100043778	5-00-51115- 78488 -5	48mm x 54.8m	10 mils	Black	24
7100043836	5-07-50351- 50004 -3			Silver	16



Cylinder Adhesives

3M™ Cylinder Spray Adhesive VTG100

Industrial strength contact adhesive. Versatile and cost effective; bonds to a wide range of natural and synthetic materials. Designed for either temporary or permanent bonding; applies quickly and easily at temperatures as low as 30°F (-1°C).



Material ID	UPC	Size	Weight	Color	Each/Case
7100044661	0-00-51128- 96899 -4	Large	40 lbs.	Clear	1

Not for consumer/retail sale or use.



3M™ Low VOC Cylinder Spray Adhesive VTG200

An industrial strength, low volatile organic compound contact adhesive. Specifically designed for HVAC and insulation applications. Bonds to insulation, foam, fiberglass, cork, fabrics, glass, metal and plastics as well as other natural and synthetic materials. Applies easily at temperatures as low as 30°F (-1°C).



Material ID	UPC	Size	Weight	Color	Each/Case
7100044662	0-00-51128- 96900 -7	Large	40 lbs.	Clear	1

Not for consumer/retail sale or use.

3M™ HoldFast 70 Cylinder Spray Adhesive

An extremely versatile, fast-tacking industrial grade spray adhesive with a unique wide-web spray pattern well suited for bonding a variety of construction materials. It requires a short dry time yet provides long open time to perfectly position your materials. It is an effective adhesive for waterproofing and protecting from moisture.



Material ID	UPC	Size	Weight	Color	Each/Case
7100138479	5-00-48011- 61690 -7	Large	27.3 lbs.	Clear	1

Not for consumer/retail sale or use.

Cylinder Accessories

3M™ Cylinder Adhesive Applicator

Standard output device for use with most of our cylinder spray adhesive products and is recommended where normal output rates are desired. We combine durable, all metal construction, a balanced design and comfortable grip to provide effective control during operation.



Material ID	UPC	Output	Includes Tip	Each/Case
7000028628	0-00-48011- 61706 -0	Standard	9501	1
7000028630	5-00-51111- 07329 -7	High	QSS	

18" Extension included.

3M™ Cylinder Adhesive Spray Tips

Control your adhesive output from 2 to 18". Proper spray patterns provide uniform coverage and consistent drying times to help keep projects moving forward.



Material ID	UPC	Spray Tip	Each/Case
7000046659	0-00-48011- 61993 -4	QSS	1
7000046661	0-00-48011- 61707 -7	9501	

3M™ Cylinder Adhesive Hose

Provide convenient length and portability needed to accomplish small-, medium- and large-area coverage applications, such as flooring, dry wall and hard-to-reach areas. The convenience afforded by the various lengths allows the worker to cover areas with tank in hand or from a bulk tank and keeps the hose from interfering or tangling.



Material ID	UPC	Size	Color	Each/Case
7000046656	0-00-51115- 25036 -1	6'	Black	1
7000028624	0-00-48011- 61988 -0	12'		
7000046657	0-00-48011- 61989 -7	25'		
7000121609	0-00-51115- 25782 -7	50'		



Aerosol Adhesives

3M™ Super 77™ Multipurpose Spray Adhesive

An extremely versatile, fast-drying spray adhesive that bonds a wide range of lightweight materials. Our permanent bond provides fast results to keep projects moving ahead. The photo-safe spray formula is easy to dispense and apply directly onto surfaces and materials where needed, with no soak-in or yellowing over time.



Material ID	UPC	Net Weight	Color	Can/Case
7000000931	5-00-21200- 49868 -3	16.75 oz.	Clear	12

3M™ Super 77™ CA Multi-Purpose Spray Adhesive — Low VOC <25%*

An extremely versatile, fast-drying adhesive that bonds a wide range of lightweight materials quickly, without soaking through. Its fast, aggressive tack makes it ideal for a wide variety of projects.



Material ID	UPC	Net Weight	Color	Can/Case
7100014109	5-00-51111- 97956 -8	18 oz.	Clear	12

*Meets CARB/OTC VOC requirements and helps contribute to LEED® credits. Review applicable VOC requirements to ensure local compliance GREENGUARD Gold Certified.

3M™ Polystyrene Insulation 78 Spray Adhesive

A high strength, industrial grade spray adhesive. It is effective for bonding most types of insulation such as fiberglass and expanded polystyrene foam (EPS) onto numerous kinds of materials.



Material ID	UPC	Net Weight	Color	Can/Case
7000046590	5-00-48011- 62843 -6*	17.9 oz.	Clear	12
7000046591	5-00-51111- 07279 -5		Inverted	

*Not for sale or use CA and other states. Consult local air quality rules before use.

3M™ Hi-Strength 90 Spray Adhesive

An extremely versatile, fast-drying spray adhesive that bonds strongly to a wide range of materials. Our permanent bond provides fast results to keep projects moving ahead. The spray formula is easy to dispense, offering a variable-width spray pattern, and applies directly onto surfaces and materials where needed.



Material ID	UPC	Net Weight	Color	Can/Case
7000023924	5-00-48011- 62839 -9	17.6 oz.	Clear	12
7000121418	5-00-76308- 86235 -5	12.23 oz.		
7010292719	5-00-51111- 07278 -8	17.6 oz.	Inverted	

Not for sale or use CA and other states. Consult local air quality rules before use.

3M™ Hi-Strength 90 CA Spray Adhesive — Low VOC <25%*

An extremely versatile, fast-drying spray adhesive that bonds strongly to a wide range of materials. Our permanent bond provides fast results to keep projects moving ahead. The spray formula is easy to dispense, offering a variable-width spray pattern, and applies directly onto surfaces and materials where needed.



Material ID	UPC	Net Weight	Color	Can/Case
7010366483	5-00-51111- 97957 -5	19 oz.	Clear	12

Not for sale or use CA and other states. Consult local air quality rules before use.

*Meets CARB/OTC VOC requirements and helps contribute to LEED® credits. Review applicable VOC requirements to ensure local compliance GREENGUARD Gold Certified.






Duct Wrap

3M™ Fire Barrier Duct Wrap 615+

Thin, lightweight and flexible. Provides excellent insulating capabilities and offers a space-saving alternative to traditional bulky fire protection methods obtained through a gypsum wall shaft or enclosure. This wrap is commonly used in commercial kitchen grease ducts, as well as ventilation ducts.

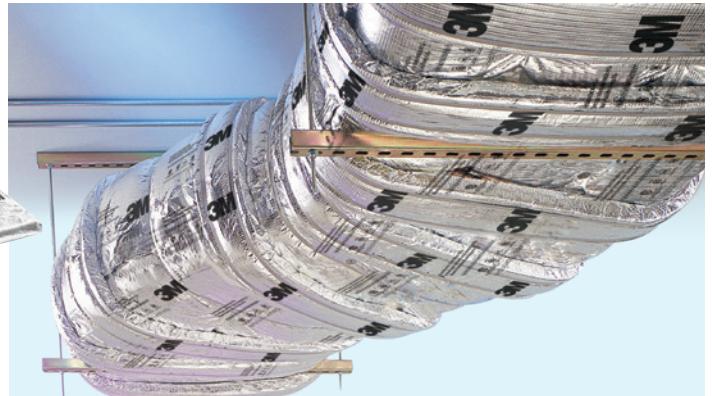

Material ID	UPC	Size	Color	Roll/Case
7000059419	0-00-51115- 54905 -2	24" x 25'	Silver	1
7100004463	0-00-51115- 54906 -9	48" x 25'		2

Dryer Ventilation Wrap

3M™ Dryer Ventilation Wrap

A fire-resistant wrap that consists of an inorganic fiber blanket encapsulated with a scrim-reinforced foil. We designed this dryer ventilation wrap as a strong, lightweight and flexible material for easy installation. This product is engineered to create a fire-resistive enclosure capable of 1-hour ratings to acceptable levels for dryer and kitchen ventilation ducts in wood frame fire rated construction.



Material ID	UPC	Size	Color	Roll/Case
7100216418	5-06-38060- 40469 -5	16" x 25' x 0.5"	Silver	1
7100216834	5-06-38060- 40495 -4	20" x 25' x 0.5"		
7100216417	5-06-38060- 40496 -1	32" x 25' x 0.5"		

Plenum Wrap

3M™ Fire Barrier Plenum Wrap 5A+

A fire-resistant wrap that consists of an inorganic fiber blanket encapsulated with a scrim-reinforced foil. We designed this plenum wrap as a strong, lightweight and flexible material for easy installation. This product is engineered to create a fire-resistive enclosure that can reduce flame and smoke spread ratings to acceptable levels in return air plenums.




Material ID	UPC	Size	Color	Roll/Case
7000133846	0-00-51115- 18802 -2	½" x 24" x 50'	Silver	1
7000059415	5-00-51115- 18805 -8	½" x 48" x 25'		2

E-Mat

3M™ Interam™ Endothermic Mat E-5A-4

Easy-to-install heat-absorbing wrap system that provides excellent fire resistance for structural steel components, critical electrical components and wall opening membranes. When exposed to intense heat, the mat releases chemically-bound water to cool its outer surfaces. Installers can easily cut the material to fit even complex installations.



Material ID	UPC	Size	Color	Roll/Case
7000031969	0-00-51115- 54913 -7	24.5" x 20'	Silver	1



Sealants, Sprays & Tapes

3M™ Fire Barrier Sealant IC 15WB+

Engineered to form a monolithic seal after drying. One-part, gun-grade, intumescent firestop sealant that provides up to 3-hour fire protection in tested and listed systems. Helps prevent the spread of fire, smoke and noxious gas, while acting as an acoustic barrier to help minimize noise transfer.



Material ID	UPC	Size	Color	Each/Case
7100011413	5-00-51115- 16557 -8	10.1 fl. oz. Cartridge	Yellow	12
7000059405	5-00-51115- 16560 -8	20 fl. oz. Sausage		10
7000059404	0-00-51115- 16558 -0	4.5 Gallon Pail		1

3M™ Fire Barrier Sealant CP 25WB+

A fire sealant to dry and form a monolithic firestop seal that also acts as a barrier to airborne sound transmission.

A red, one-component, gun-grade, latex-based, intumescent firestop sealant. This fire barrier sealant helps control the spread of fire, smoke and noxious gases before, during and after exposure to a fire.



Material ID	UPC	Size	Color	Each/Case
7000006383	5-00-51115- 11638 -9	10.1 fl. oz. Cartridge	Red	12
7000059394	5-00-51115- 11641 -9	27 fl. oz. Cartridge		6
7000145569	5-00-51115- 11642 -6	20 fl. oz. Sausage		10
7100006311	0-00-51115- 11639 -1	2 Gallon Pail		1
7000006379	0-00-51115- 11640 -7	5 Gallon Pail		

3M™ Fire Barrier Water Tight Sealant 3000 WT

A gun-grade, intumescent, silicone, elastomeric sealant that cures upon exposure to the atmosphere to form a monolithic flexible firestop seal. Properly installed, this sealant helps control the spread of fire, smoke and noxious gasses before, during and after exposure to fire and exhibits good adhesion to a full range of construction substrates.



Material ID	UPC	Size	Color	Each/Case
7000006386	5-00-51115- 16593 -6	10.1 fl. oz. Cartridge	Gray	12
7000059413	5-00-51115- 18788 -4	20 fl. oz. Sausage		12
7100006306	5-00-51115- 16594 -3	4.5 Gallon Pail		1

3M™ FireDam™ Spray 200

A sprayable material that dries to form a tough, elastomeric coating. It will firestop building joints, curtain wall perimeter joints and through penetration seals to control the transmission of fire, heat, smoke and noxious gas. This water-based firestop sealer is applied with conventional airless sprayers, dries quickly and cleans up easily.



Material ID	UPC	Size	Color	Each/Case
7000026567	0-00-51115- 18798 -8	5 Gallon Pail	Red	1
7100006336	0-00-51115- 18797 -1		Gray	

3M™ Fire Barrier Watertight Spray


A sprayable, moisture-curing hybrid siliconized polymer that forms a tough, elastomeric coating. This material is used to firestop perimeter joints (curtain wall joints) and other construction joints that need to prevent fire and water from moving floor to floor.



Material ID	UPC	Size	Color	Each/Case
7100139274	0-00-76308- 98232 -4	5 Gallon Pail	Red	1
7100138396	0-00-76308- 86113 -1		White	

3M™ Fire and Water Barrier Tape

An elastomeric fire, water, smoke and sound tape. When installed properly it can act as a barrier to water leakage and airborne sound transmission, while helping to control the transmission of fire, heat and smoke.



Material ID	UPC	Prod ID	Size	Color	Roll/Case
7100139307	5-00-76308- 86899 -9	FWBT2	2" x 75'	Translucent	24
7100166471	5-00-76308- 14453 -6	FWBT3	3" x 75'		24
7100139303	5-00-76308- 86900 -2	FWBT4	4" x 75'		12
7100166467	5-06-38060- 13899 -6	FWBT6	6" x 75'		8
7100139309	5-00-76308- 86901 -9	FWBT8	8" x 75'		4
7100139304	5-00-76308- 86902 -6	FWBT12	12" x 75'		4

3M™ Smoke and Sound Tapes





















An elastomeric tape that can act as a barrier to smoke and airborne sound in non-fire-rated wall and floor assemblies.



Material ID	UPC	Prod ID	Size	Color	Roll/Case
7100138393	5-00-76308- 86903 -3	SST2	2" x 75'	Translucent	24
7100152602	5-00-76308- 14452 -9	SST3	3" x 75'		16
7100139305	5-00-76308- 86936 -1	SST4	4" x 75'		12
7100138394	5-00-76308- 86937 -8	SST8	8" x 75'	Gray	4
7100138395	5-00-76308- 86938 -5	SST12	12" x 75'		















Protective Eyewear

	Material ID	UPC	Prod ID	Color	Pair/Case	Features
3M™ SecureFit™ Protective Eyewear – 200 Series						
	7100090435	1-00-78371- 65717 -5	SF201AF	Clear Anti-Fog Lens	20	<ul style="list-style-type: none">Secure, comfortable fit with 3M™ Pressure Diffusion Temple (PDT) TechnologyPolycarbonate lens absorbs 99.9% UVA & UVB; meets the requirements of ANSI Z87.1-2015Contemporary and lightweight, weighs less than 1 oz.Molded nose bridge
	7000128262	1-00-78371- 65720 -5	SF201AS	Clear Anti-Scratch Lens		
	7100180044	5-00-51131- 27843 -6	SF201SGAF-BLU	Blue Temple, Scotchgard™ Anti-Fog Coating		
	7100022210	1-00-78371- 65718 -2	SF202AF	Gray Anti-Fog Lens		
	7100022211	1-00-78371- 65721 -2	SF202AS	Gray Anti-Scratch Lens		
	7100021793	1-00-78371- 65719 -9	SF203AF	Amber Anti-Fog Lens		
	7010293198	1-00-78371- 65722 -9	SF203AS	Amber Anti-Scratch Lens		
3M™ SecureFit™ Protective Eyewear – 400 Series						
	7100112435	1-00-78371- 66211 -7	SF401AF	Clear Anti-Fog Coating	20	<ul style="list-style-type: none">Motion-inspired, contoured piping in bold, modern colorsProprietary 3M™ Pressure Diffusion Temple (PDT) Technology minimizes pressure over the ear without compromising securityAvailable in a variety of lens colors for a range of applications; polycarbonate lenses absorb 99.9% of UVA and UVB raysAll options meet the requirements of ANSI Z87.1 Standard as an Impact Rated spectacleEffective for at least 25 washes with water,* Scotchgard™ Anti-Fog Lens Coating provides abrasion and fog resistance <p>*When tested using EN168 Resistance to Fogging of Oculars and Resistance to Surface Damage by Fine Particles test methods.</p>
	7100112131	5-00-51131- 27475 -9	SF401AF-FM	Clear Anti-Fog Coating, Foam Gasket		
	7100158218	5-00-51131- 27715 -6	SF401SGAF-RED	Red/Gray, Scotchgard™ Anti-Fog Coating		
	7100150838	5-00-51131- 27728 -6	SF401SGAF-BLU	Blue/Gray, Scotchgard™ Anti-Fog Coating		
	7100156104	5-00-51131- 27731 -6	SF401SGAF-BLU-F	Blue/Gray, Scotchgard™ Anti-Fog Coating, Foam Gasket		
	7100112433	1-00-78371- 66212 -4	SF402AF	Gray Anti-Fog Coating		
	7100112244	5-00-51131- 27565 -7	SF402AF-FM	Gray Anti-Fog Coating, Foam Gasket		
	7100156101	5-00-51131- 27734 -7	SF402SGAF-BLU	Blue/Gray, Scotchgard™ Anti-Fog Coating		
	7100156137	5-00-51131- 27732 -3	SF402SGAF-BLU-F	Blue/Gray, Scotchgard™ Anti-Fog Coating, Foam Gasket		
	7100158219	5-00-51131- 27735 -4	SF403SGAF-YEL	Yellow/Black, Amber Scotchgard™ Anti-Fog Coating.		
	7100155940	5-00-51131- 27736 -1	SF405SGAF-BLA	Black/Brown, Brown Scotchgard™ Anti-Fog Coating.		
	7100156103	5-00-51131- 27729 -3	SF407SGAF-BLU	Blue/Gray, Gray Scotchgard™ Anti-Fog Coating.		
	7100112436	1-00-78371- 66213 -1	SF410AS	Indoor/Outdoor Mirror Anti-Scratch Lens		
	7100112223	5-00-51131- 27545 -9	SF410AS-FM	Indoor/Outdoor Mirror Anti-Scratch Lens, Foam Gasket		
	7100115326	1-00-78371- 66512 -5	SF415AF	Clear Anti-Fog Coating, +1.5 Diopter		
	7100115325	1-00-78371- 66513 -2	SF420AF	Clear Anti-Fog Coating, +2.0 Diopter		

See Warnings on Page 13



Protective Eyewear

	Material ID	UPC	Prod ID	Color	Pair/Case	Features
3M™ SecureFit™ Protective Eyewear – 400X Series						
	7100180045	5-00-51131- 27845 -0	SF401XAF-GRN	Hi-Vis Green/Black, Clear Anti-Fog Coating	20	<ul style="list-style-type: none">● Contoured brow guard rests comfortably against forehead● 3M™ Pressure Diffusion Temple Technology● Soft nosepiece to help reduce slippage
	7100180048	5-00-51131- 27848 -1	SF401XSGAF-GRN	Hi-Vis Green/Clear, Clear Scotchgard™ Anti-Fog Coating		
3M™ SecureFit™ Protective Eyewear – 600 Series						
	7100128689	5-00-51131- 27337 -0	SF601SGAF	Clear Scotchgard™ Anti-Fog Coating	20	<ul style="list-style-type: none">● Secure, comfortable fit with 3M™ Pressure Diffusion Temple (PDT) Technology● Long lasting clarity with Scotchgard™ Anti-Fog Coating which retains its effectiveness for at least 25 washings with water*● Stylish, sturdy frame that nearly anyone can wear● Optional removable foam-lined gasket helps keep debris out of your eyes while providing comfort and cushioning● Additional personal protective equipment may be required for SF617AS, SF630AS and SF650AS <p>*When tested using EN168 Resistance to Fogging of Oculars and Resistance to Surface Damage by Fine Particles test methods.</p>
	7100133322	5-00-51131- 27340 -0	SF601SGAF-FM	Clear Scotchgard™ Anti-Fog Coating, Foam Gasket		
	7100128690	5-00-51131- 27338 -7	SF602SGAF	Gray Scotchgard™ Anti-Fog Lens		
	7100132350	5-00-51131- 27341 -7	SF602SGAF-FM	Clear Scotchgard™ Anti-Fog Lens, Foam Gasket		
	7100132351	5-00-51131- 27342 -4	SF607SGAF	Indoor/Outdoor, Grey Scotchgard™ Anti-Fog Coating		
	7100132359	5-00-51131- 27348 -6	SF620SGAF	Clear Scotchgard™ Anti-Fog Coating		
	7100132361	5-00-51131- 27351 -6	SF620GSGAF	Grey Scotchgard™ Anti-Fog Coating		
3M™ SecureFit™ Protective Eyewear – 3700 Series						
	7100203179	5-00-51131- 27896 -2	SF3701SGAF-BLU	Blue Temple, Scotchgard™ Anti-Fog Coating	10	<ul style="list-style-type: none">● Over-the-glass protection● All day wearability● Angle adjustment points on the temple
3M™ Light Vision™ 2 Protective Eyewear						
	7000002361	1-00-78371- 62111 -4	11476-00000-10	Clear Anti-Fog Lens, Gray Frame, Lights	10	<ul style="list-style-type: none">● An illuminating choice for detailed indoor or outdoor work● Adjustable, hands-free LED bulbs for darker work environments● High wrap lens offers additional coverage● Features magnifying diopters for workers who have difficulty reading small print or are engaged in small detail work
	7000127507	1-00-78371- 62113 -8	11478-00000-10	Clear Anti-Fog Lens, Gray Frame, Lights, +2.0 Diopt		



WARNING: PROTECTIVE EYEWEAR

These eye and face protection products help provide limited eye and face protection. **Misuse or failure to follow warnings and instructions may result in serious potential injury, including blindness or death.** For proper use, selection, and applications against flying particles, optical radiation and/or splash, consult supervisor and User Instructions and warnings on package, or call 3M Technical Service in the U.S.A. at 1-800-243-4630. In Canada, call 1-800-267-4414.



Hearing Protection

3M™ E-A-R™ Classic™ Earplugs

Uncorded earplugs set the standard in hearing protection as the world's first foam earplugs. Constructed from slow-recovery foam, the disposable earplug comes in a clean, convenient pillow pack.



Material ID	UPC	Prod	Color	Pair/Case
7000002299	1-00-80529- 10000 -6	310-1001	Yellow	2,000

WARNING: HEARING PROTECTION

These hearing protectors help reduce exposure to hazardous noise and other loud sounds. **Misuse or failure to wear hearing protectors at all times that you are exposed to noise may result in hearing loss or injury.** For correct use, consult supervisor and User Instruction, or call 3M Technical Service in the U.S.A. at 1-800-243-4630. In Canada, call 1-800-267-4414. If there is any drainage from your ear or you have an ear infection, consult with your physician before wearing earplugs. Failure to do so may result in hearing loss or injury.

Disposable Respirators

3M™ Particulate Respirator 8511, N95

This disposable N95 particulate respirator features the proprietary 3M™ Cool Flow™ Valve and helps provide comfortable, reliable worker respiratory protection. It is ideally suited for hot/dusty work settings that require long periods of wear.



Material ID	UPC	Size	Color	Each/Case
7000002056	5-00-51138- 54343 -8	Standard	White	80

3M™ Particulate Respirator 8210, N95

Classic disposable N95 particulate respirator designed to help provide comfortable, reliable worker respiratory protection against certain non-oil based particles.



Material ID	UPC	Size	Color	Each/Case
7100132742	5-00-51138- 46457 -3	Standard	White	160

Reusable Respirators

3M™ Full Facepiece Reusable Respirators

This full facepiece reusable respirator offers lightweight comfort and ease of use. Combine with appropriate 3M™ particulate filters or cartridges to help provide respiratory protection against particulates and/or a variety of gases and vapors.



Material ID	UPC	Prod ID	Size	Each/Case
7000002030	5-00-51138- 54146 -5	6800	Medium	4
7000002037	5-00-51138- 54159 -5	6900	Large	

3M™ Half Facepiece Reusable Respirators

This half facepiece reusable respirator offers reliable and convenient respiratory protection and is suitable for many situations, helping provide protection against particulates and a wide variety of gases and vapors according to NIOSH approvals.



Material ID	UPC	Prod ID	Size	Each/Case
7000001933	5-00-51131- 07025 -2	6200	Medium	24
7000001934	5-00-51131- 07026 -9	6300	Large	

3M™ Particulate Filter 2091, P100

99.97% filter efficiency meets NIOSH P100-series test criteria. Protection against oil and non-oil based particulate contaminants. Bayonet compatibility allows use with many 3M half and full facepiece designs.



Material ID	UPC	Product ID	Each/Case
7000051991	5-00-51131- 07000 -9	2091 Particulate Filter, P100	100

WARNING: RESPIRATORS



These respirators help protect against certain airborne contaminants. Before use, the wearer must read and understand the User Instructions provided as a part of the product packaging. A written respiratory protection program must be implemented meeting all the requirements of OSHA 29 CFR 1910.134 including training, fit testing and medical evaluation. In Canada, CSA standards Z94.4 requirements must be met and/or requirements of the applicable jurisdiction, as appropriate. **Misuse may result in sickness or death.** For correct use, consult supervisor and User Instructions or call 3M Technical Service in the U.S.A. at 1-800-243-4630. In Canada, call 1-800-267-4414.



Protective Coveralls

3M™ Protective Coverall 4510

A disposable safety work wear made of a high quality microporous laminated material. It helps provide basic barrier protection against light liquid splashes and hazardous dusts.

Material ID	UPC	Size	Color	Each/Case
7000109028	0-00-51131- 49788 -7	M	White	25
7000109029	0-00-51131- 49789 -4	L		
7000109030	0-00-51131- 49790 -0	XL		
7000109031	0-00-51131- 49791 -7	XXL		
7000109032	0-00-51131- 49792 -4	3XL		



Work Gloves

3M™ Comfort Grip Gloves

A nitrile palm coating that makes these gloves a light, flexible, abrasion-resistant and long lasting alternative to many cotton and latex palm-coated gloves. They provide excellent grip, even in wet or oily conditions. Elastic knit wrist cuff is easy to pull on and off quickly and keeps out debris.

	Material ID	UPC	Prod ID	Size	Pairs/Bag	ANSI* Cut Level	EN388**
General Use							
	7100034912	5-00-54007- 98954 -2	CGM-GU	8M	6	N/A	3122A
	7100034911	5-00-54007- 98955 -9	CGL-GU	9L			
	7100034910	5-00-54007- 98956 -6	CGXL-GU	10XL			
Winter							
	7010352930	5-00-54007- 99150 -7	CGM-W	8M	6	N/A	2121A
	7010305066	5-00-54007- 99151 -4	CGL-W	9L			
	7010352931	5-00-54007- 99152 -1	CGXL-W	10XL			
Cut Resistant							
	7100023132	5-00-54007- 98957 -3	CGM-CR	8M	6	A3	4444D
	7100023421	5-00-54007- 98958 -0	CGL-CR	9L			
	7100023131	5-00-54007- 98959 -7	CGXL-CR	10XL			
	7100097229	5-00-51128- 61032 -4	CGM-CRE	8M	6	A1	4342B
	7100097230	5-00-51128- 61033 -1	CGL-CRE	9L			
	7100023131	5-00-51128- 61034 -8	CGXL-CRE	10XL			

*ANSI 105-2016 Cut Level (A1 – A9). Previous ANSI ratings based on ANSI 105-2011 Cut Level (0-5). For more information on ratings changes, please reach out to your 3M sales representative.

**EN 388:2016: Abrasion Level (1-4), Coupe Cut Level (1-5), Tear (1-4), Puncture (1-4), TDM Cut Test (A-F). Please note that the TDM cut resistance test is the reference performance result, and the Coupe test results are only indicative where both cut resistance test results are shown for EN388:2016. Previous EN 388 levels based on EN 388 2003: Abrasion (1-4), Coupe cut test (1-5), Tear (1-4), Puncture (1-4). For more information on ratings changes, please reach out to your 3M sales representative.

Visit [3M.com/workersafety](https://www.3m.com/workersafety) for a full offering of 3M Personal Protective Equipment.

Warranty, Limited Remedy, and Disclaimer: Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. User is solely responsible for evaluating the 3M product and determining whether it is fit for a particular purpose and suitable for user's method of application. Unless an additional warranty is specifically stated on the applicable 3M product packaging or product literature, 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. 3M MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY OR CONDITION ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE. If the 3M product does not conform to this warranty, then the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price.

Limitation of Liability: Except where prohibited by law, 3M will not be liable for any loss or damage arising from the 3M product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability.



**3M Building and Construction
Markets**

Building 225-3S-06
St. Paul, MN 55144-1000
1-866-513-4026
3M.com/construction

Please Recycle. Printed in U.S.A.
© 3M 2020 All rights reserved.
78-9236-7829-2 Mar 2020

3M, Classic, Cool Flow, E-A-R, FireDam, Interam, Light Vision, SecureFit, Super 77, Venture Tape and VentureClad are trademarks of 3M.